

Specifications CE, CCC, CSA

Input voltages (3-PH) and currents	VAC	Hz	Amps
	200/208	50 – 60	62/58
	240	60	52
	400	50 – 60	32
	440	60	28
	480	60	26
	600	60	21
Output voltage	50 – 150 VDC		
Output current	130 A		
Duty cycle	100%		
Maximum OCV	311 VDC		
Dimensions	1079.5 mm (42.5") D, 566.4 mm (22.3") W, 967.7 mm (38.1") H		
Weight with torch	317.5 kg (700 lbs)		
Gas supply			
Plasma gas	O ₂ , N ₂ , F5*, H35**, Air		
Shield gas	N ₂ , O ₂ , Air		
Gas pressure	8.3 bar (120 psi) Manual gas console 8 bar (115 psi) Automatic gas console		

* F5 = 95% N₂, 5% H

** H35 = 35% H, 65% Ar

Hypertherm, quality built in

HyperPerformance Plasma systems have been subjected to thousands of hours of reliability testing in Hypertherm's laboratories. The results give Hypertherm the confidence to boast a 100% duty cycle in operating environments from -10° C to 40° C.

- CCC, CE, CSA certification.
- Hypertherm is ISO 9001:2000 certified.
- Hypertherm full-system warranty – complete coverage for two years on all system components and one year on the torch.
- Enhanced serviceability and reduced part count provide a simple, robust design.

Operating data

Virtually dross-free cutting capacity – mild steel

16 mm (5/8")

Production pierce capacity – mild steel

25 mm (1")

Maximum cutting capacity (edge start) – mild steel

38 mm (1 1/2")

Material	Current (amps)	Thickness (mm)	Approximate cutting speed (mm/min.)	Thickness (inches)	Approximate cutting speed (ipm)	
Mild steel O ₂ plasma O ₂ shield	30	.5	5355	.018	215	
		1	3615	.036	155	
		1.5	2210	.060	85	
		3	1160	.135	40	
		6	665	1/4	25	
		80	3	6145	.135	180
	6		3045	1/4	110	
	10		1810	3/8	75	
	12		1410	1/2	50	
	20		545	3/4	25	
	O ₂ plasma Air shield		130	6	4035	1/4
		10		2680	3/8	110
12		2200		1/2	80	
20		1050		3/4	45	
25		550		1	20	
38		255		1 1/2	10	
Stainless steel F5* plasma N ₂ shield		45	1	5740	.036	240
			2.5	2510	.105	90
			6	845	1/4	30
		80	4	2180	.135	105
			6	1225	1/4	45
			10	560	3/8	25
H35** plasma N ₂ shield	130	10	980	3/8	40	
		12	820	1/2	30	
		20	360	3/4	15	
		25	260	1	10	
		Aluminum Air/Air	45	1.5	4420	.048
4	2575			.135	110	
6	1690			1/4	60	
130	12		1455	1/2	55	
	20		940	3/4	40	
	25		540	1	20	

Note: Take care in comparison: Competitors often show maximum cutting speeds, rather than speeds that deliver the best cuts, as shown above. Cut speeds listed above deliver best cut quality, but cut speeds can be up to 50% faster.

The operating data chart does not list all processes available for the HPR130. Please contact Hypertherm for more information.

Hypertherm®

Hypertherm, Inc. USA 603-643-3441 Tel 603-643-5352 Fax mechanized.info@hypertherm.com

Hypertherm Automation, LLC USA 603-298-7970 Tel 603-298-7977 Fax info@hyperthermautomation.com

Hypertherm Plasmatechnik, GmbH Deutschland 49 6181 58 2100 Tel 49 6181 58 2134 Fax HTDeutschland.info@hypertherm.com

Hypertherm (S) Pte Ltd. Singapore 65 6 841 2489 Tel 65 6 841 2490 Fax HTSingapore.info@hypertherm.com

Hypertherm (Shanghai) Consulting Co., Ltd. P.R. China 86 21 5835 5362 /3 Tel 86 21 5835 5220 Fax HTChina.info@hypertherm.com

Hypertherm Branch of Hypertherm UK, LLC England 00 800 3324 9737 Tel 00 800 4973 7329 Fax HTUK.info@hypertherm.com

France 00 800 3324 9737 Tel 00 800 4973 7329 Fax HTFrance.info@hypertherm.com

Hypertherm S.r.l. Italia 39 02 725 46 312 Tel 39 02 725 46 400 Fax HTItalia.info@hypertherm.com

Hypertherm Europe B.V. Nederland 31 165 596907 Tel 31 165 596901 Fax HTEurope.info@hypertherm.com


Japan 81 0 559 75 7387 Tel 81 0 559 75 7376 Fax HTJapan.info@hypertherm.com

HYPERTHERM BRASIL LTDA. 55 11 6482 1087 Tel 55 11 6482 0591 Fax HTBrasil.info@hypertherm.com

Hypertherm, HyperPerformance, HyperDefinition, LongLife and HPR are trademarks of Hypertherm, Inc., and may be registered in the United States and/or other countries.

© Copyright 12/04 Hypertherm, Inc. Revision 1
870290

www.hypertherm.com

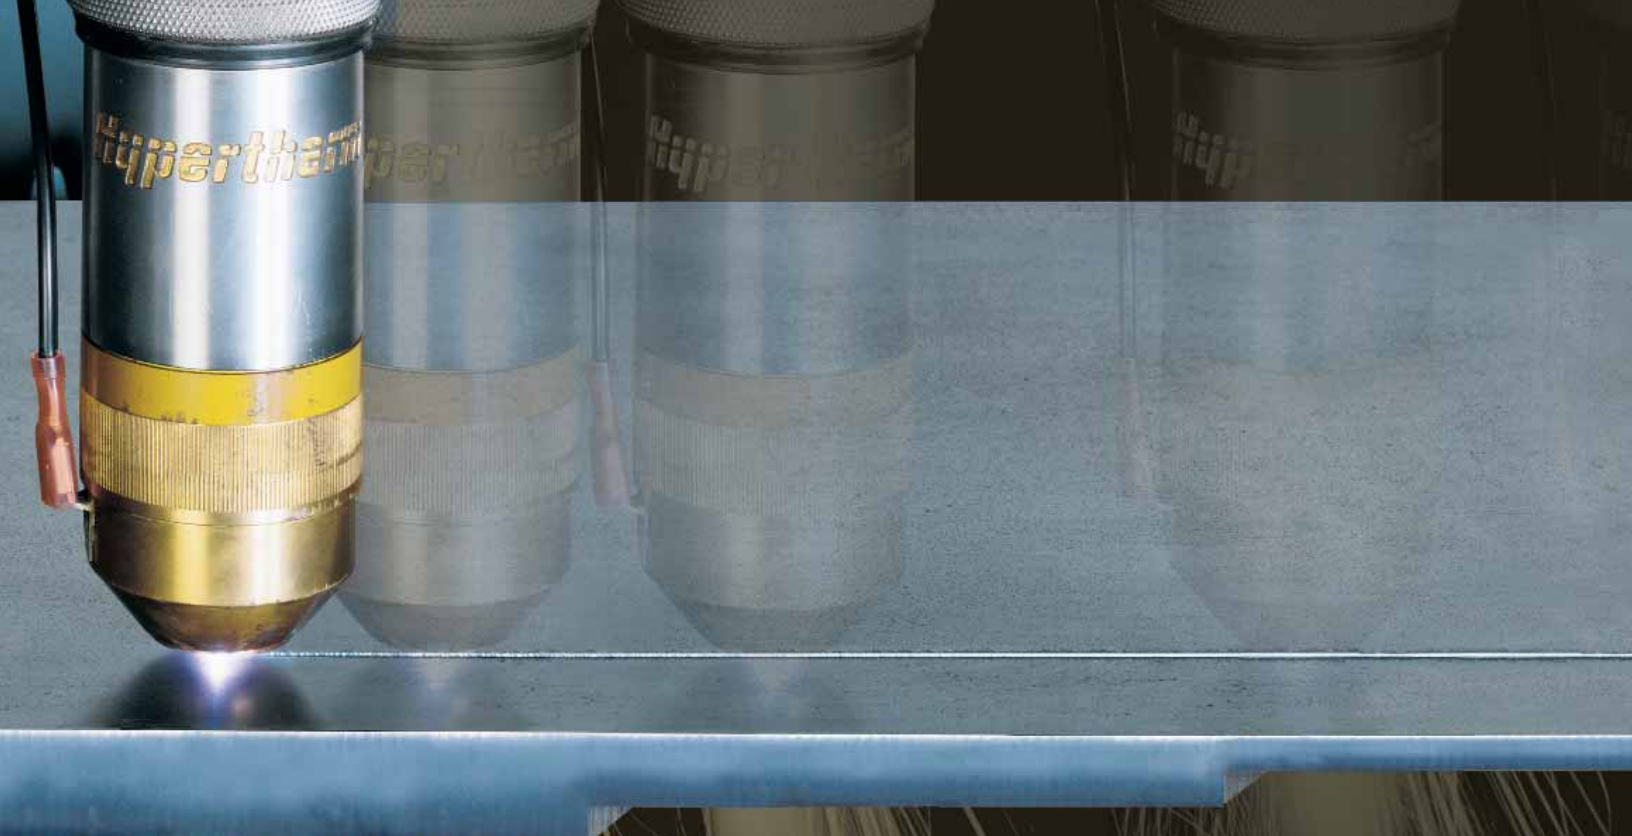


HyPerformance™ Plasma HPR130™

*Superior cut quality and consistency
Maximized productivity
Minimized operating costs*


Hypertherm®

Superior cut quality and consistency

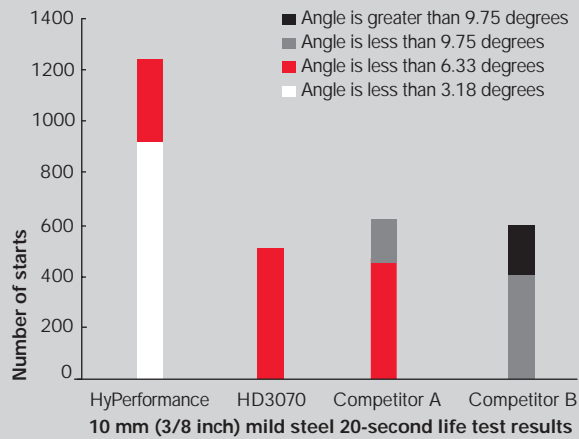

- Lower cut angle variability than any "precision" competitor tested.
- Consistent, repeatable cutting performance.
- Virtually dross-free cutting reduces the need for secondary operations.

Maximized productivity

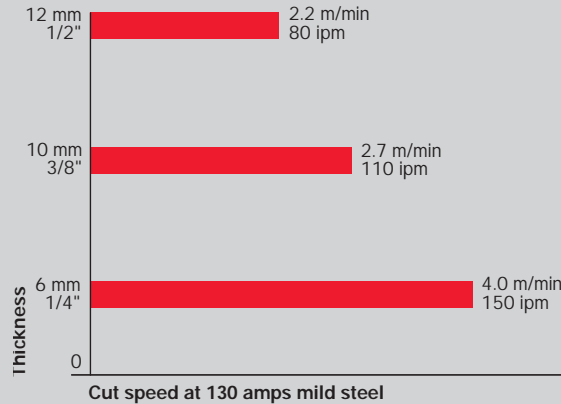

- Increased cut speeds, approaching 200-amp processes.
- Cut speeds listed deliver the best cut quality, but cut speeds can be up to 50% faster.
- Rapid cut-to-cut cycle times increase productivity.

The next generation

Hypertherm has led the advancement of plasma cutting technology for over 35 years and is the world's foremost manufacturer of plasma arc cutting equipment. By continually delivering breakthrough advances in cut quality, productivity and operating costs, Hypertherm reaffirms and extends its position as the world's leading supplier of advanced high-temperature metal cutting technology.

HyPerformance Plasma delivers incomparable HyDefinition® cutting at half the operating cost


HyPerformance Plasma delivers the virtually dross-free cut quality of HyDefinition, but does it with greater consistency, faster cut speeds, longer consumable life and half the operating cost.

HyPerformance Plasma provides a wide range of process flexibility



Stainless steel cuts


Patented HyDefinition cutting for consistent quality cutting

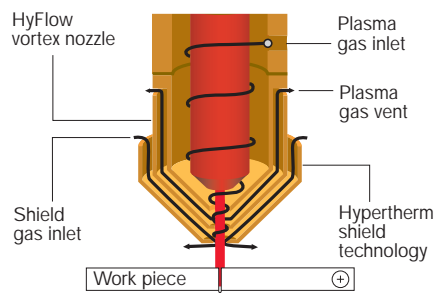

HyFlow vortex technology stabilizes the arc precisely in the center of the electrode. This consistency improves cut quality and extends consumable life.


- Patented HyDefinition cutting for consistent cut quality.
- Full range of cutting thicknesses from gauge material to production piercing of 25 mm (1 inch).
- Superior HyPerformance stainless steel cutting.
- Marking and cutting performed with the same consumables.
- Quick-disconnect torch for simple and fast consumable changes.

Longer consumable life

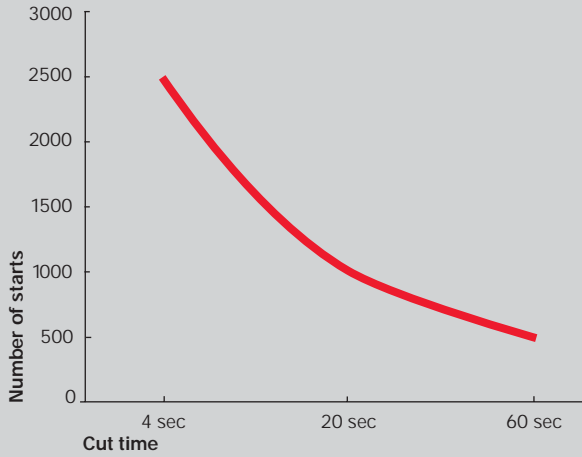

- Hypertherm's patented LongLife process significantly extends consumable life.
- Patent-pending water tube and electrode design delivers improved consumable life and consistent cut quality.

Minimized operating costs

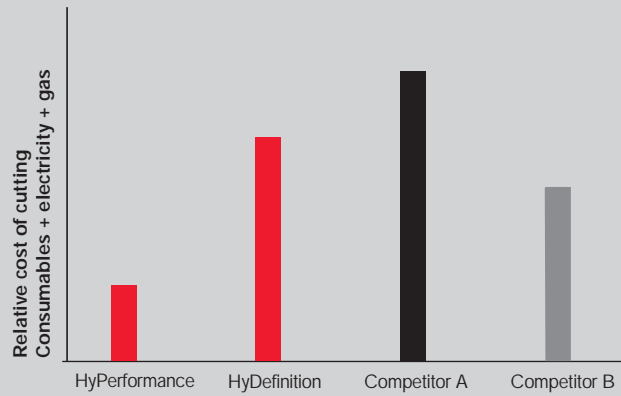

- Half the operating costs of any "precision" competitor tested.
- HyDefinition cut quality at half the operating costs.

of mechanized plasma

HyPerformance Plasma is designed to be operator-friendly and highly consistent

Simple, easy-to-use controls

- Manual gas console with power, current, troubleshooting and gas settings in one console.
- Auto gas fully integrated into CNC for full control of all plasma parameters.*



Manual gas console



Power supply

Manual off-valve assembly



Quick-disconnect torch assembly with leads


HyPerformance Plasma is available with auto gas or manual gas delivery

- Responsive gas control compensates for variation in incoming pressure.
- The automatic and manual gas systems both provide diagnostic information via serial link to CNC.

Additional benefits of auto gas delivery

- Gas delivery is monitored and controlled near the torch for optimal cut quality and consumable life.
- Fast switching from cutting to marking.
- Full integration to CNC for control of all plasma parameters
- Fuel gas mixing for improved stainless and aluminum cutting.

Responsive gas control reduces variability, while improving cut quality and increasing consumable life

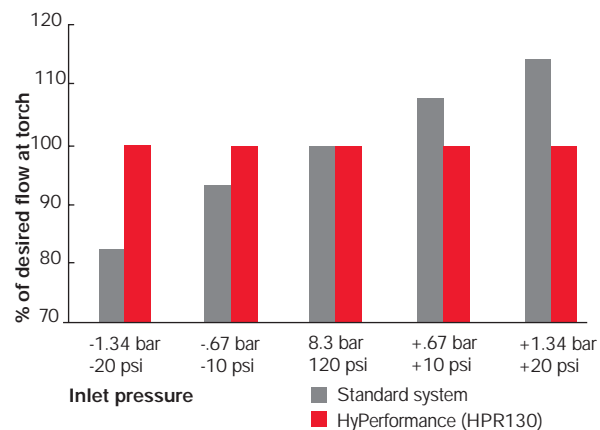

* Automatic gas selection and metering consoles not shown